Rofo®
Roofing For You

PHIM Registration No.07020229

SABAH INDUSTRY EXCELLENCE AWARD 2009

GOLDEN BULL AWARD 2012 金牛奖

www.rofo.com.my

優れた品質の亜鉛めっきタイル

Corrugated Hi-Ten Zinc Sheet "Zinc Kampong"

Product Series: RZS610

6', 8',10',12', 15', 20', 22'-3" and more....

Think Roof, Think Rofo.

欲しい 屋顶，欲しい ROFO

Ultimate Advantages

✓ Using the Fly Cutting CRF Technologies to produce cut to length even at thickness of 0.17mm. The installed Capacitiy is up to 800 mt per month.

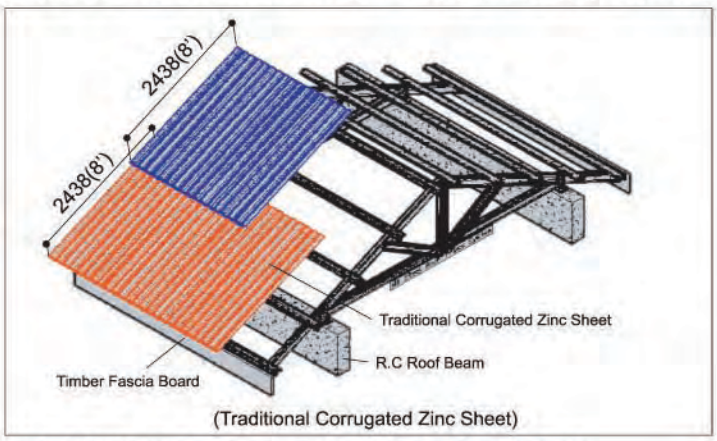

(Traditional Corrugated Zinc Sheet)

a. Traditional Type standard, Length are 6', 8', 10' and 12' only
b. Loss ±10%(±12" for length Lapping)
c. Increase the possibility of leaking
d. Increase the possibility of corrosion at the lapping point
e. Untidy

✓ Improved traditional profile with latest technologies
✓ No More uneven rib problem and all the rib are symmetry
✓ Raw material is High Tensile and attained ISO 9001
✓ Enviromental Friendly - No loss in length lapping
✓ Quality accordance to ASTM, MS, BS, JIS International Standard

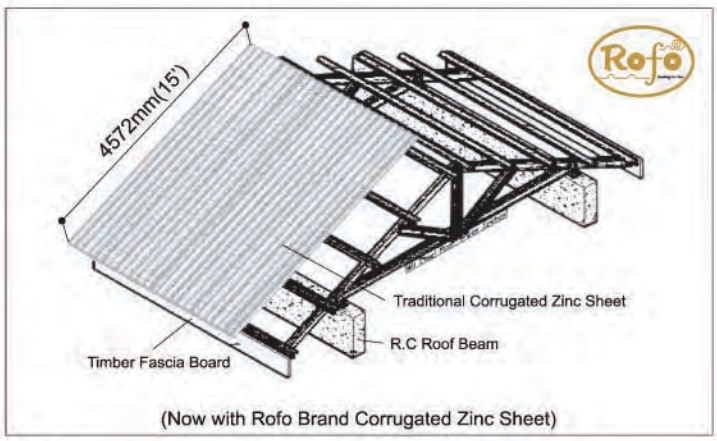

(Now with Rofo Brand Corrugated Zinc Sheet)

Solve:

a. Can Produce Any Length
b. Save Lapping Cost ±10% $ Sample
c. Reduce the chances of leaking
d. Eradicated the problem of Leakage arising at length lapped joints on low pitched Roof
e. Nice looking for continuous long span



Symmetry rib increase the profile strength

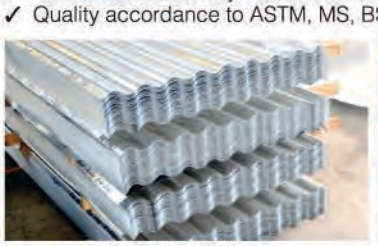

Sabah Order

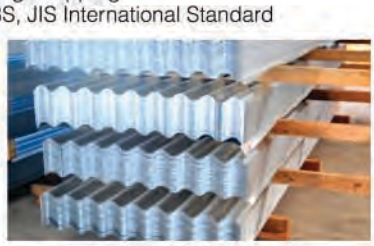

Sarawak Order

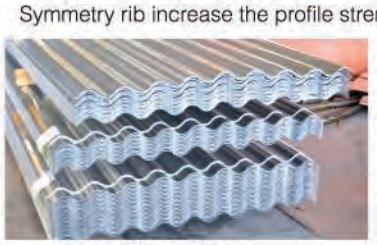

Brunei Order

Singapore Order

Introduction

The Rofo Brand Corrugated Hi-Ten Zinc sheet is the oldest and most popular profile among all metal roofing profiles, This product is now being produced using the latest CRF technologies and in accordance to JIS 3316 standards. This high quality product is not only exceeds the technical performances of other traditional corrugated profiles but is also the most economical product in terms of value for money.

Regionally, Rofo Brand Corrugated Hi-Ten Zinc Sheet is the only corrugated profile that can meet the needs for continuous long span requirements using minimum material thickness from 0.17mm and above. Rofo Brand Corrugated Hi-Ten Zinc Sheet not only save $$$$ in length lapping and but also eradicated the problem of rainwater leakages arising from length lapping ..... Save the Earth ! Thanks to CRF technologies!

Profile Diagram



Gross Width : 660 mm

Overlapping Details

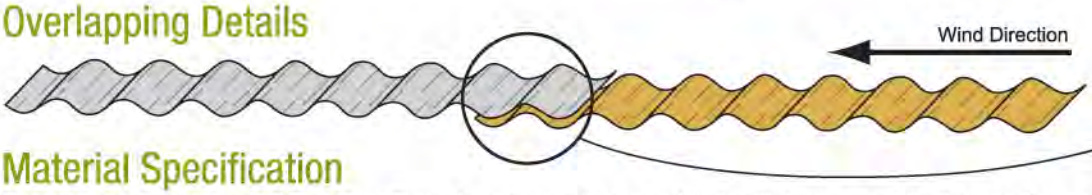

Zinc Kampong Overlapping Suggestion

Material Specification

Rofo Brand Corrugated Hi-Ten Zinc Sheet is produced from galvanized steel materials that conform to Japanese International Standard (JIS G 3302), ISO 9001 management System. All galvanized steel materials which used for the production of Rofo Brand Corrugated Hi-Ten Zinc Sheet are strictly procured from reputable mills that meets the relevant national or international standards such as JIS, ASTM, BS, AS, MS and others. Numerous internal quality control tests are carried out to ensure the materials has met the specification requirements. Quality tests such as cyclic corrosion test, condensation test, tensile test and other material conformance requirements are also conducted by other third party at our random request.

Base Metal Sheet : Hard Quality (SGCH)
JIS Standard : G3302
Base Steel Coating : Zinc Coated Z10 / Z12 / Z18
Surface finish : Regular Spangle finish
Surface treatment : Chromate Treatment

Size Available

Gauge	Thickness (±0.03mm)
35 BWG	0.17mm
34 BWG	0.20mm
32 BWG	0.23mm
28 BWG	0.30mm

Packing and Storage

The Standard factory Packing for Corrugated Hi-Ten Zinc is in 10 Pieces in and out per strap inside one big Bundle. Therefore, it's make easy to count and handling. The Quantity per bundle are based on the Thickness and Length. In case of local orders are less than the standard minimum quantity, the products will be fully covered and protected from dust or rainwater during transportation.

It is important to ensure that all roofing or cladding materials, if it is do not installed immediately upon delivery to site; they must be kept in elevated dry storage area, free from rainwater or moisture. This is to avoid water or moisture traps in between the sheet surfaces, which will cause stained marks, edge rust, de-colorization, and etc. and eventually reduced the material expected lifespan and the warranty period.

Rofo Zinc Kampong Storage

- The Rofo Brand Zinc Kampong should all the time Storage under proper shelter.
- If Roofing that affected by water should immediately wipe throughly and dried at both edges before re-stacking.

The Picture show arrangement of 10 pcs in and Out inside the bundle.

Accessories

Ridge Capping

Galvanized Nail
2" with Neoprene Washer

Packing

Note: All the measurements are in millimeters (mm), the above items shown are just some of our standard profiles; for customized or specific profile requirements, kindly contact our customer service for assistance.

Our Corrugated Zinc Kampong available in Two Different Brands.

1. For the Thickness 34BWG, 32BWG, 28BWG available in Rofo Brand *(Picture 1 shown the Rofo Brand printed to ensure the Genuine Brand).*
2. For the Thickness 35BWG available in Cap Burung *(Refer to the Picture 2 shown the Cap Burung attached to ensure the Genuine Brand).*

Picture 1

Picture 2

Manufactured by: **Kina Roof Industries (Sabah) Sdn. Bhd.** (667221-X)

©2008 All the rights reserved by Rofo (2008) Brand of series products. Rofo (2008) brand is trademark of Kina Roof Industries (Sabah) Sdn. Bhd.
Rofo reserved the right to review the specification of any materials or accessories contained herein. It is provided without prejudice to the company's terms and conditions of sale. All measurements are nominal only and are depend on the grade and gauge of material used.