

Rofo Brand Zinc Kampong *Zplus*⁺

Product Numbering Code: R6b



PHIM Registration No. 07020229

www.rofo.com.my

Think Roof, Think Rofo.™

欲しい 屋根 , 欲しい Rofo

1

**TAHAN
TEGAR**
+
耐

2

**SEJUK
+
凉**

50% Longer Lifespan

ULTIMATE ADVANTAGES (絶対優勢)

1. Last Longer
(Tahan Tegar / 耐)
- 50% Longer Lifespan

2. Genuine AZ55% (真正55%鍍鋅產品)



Rofo Brand Zinc
Kampong *Zplus*⁺
AZ55% (AZ50)

0 hour salt spray



120 hours salt spray



Galvanised Steel
鍍鋅鋼板
(Z60)



Salt spray test conducted by material supplier according to ASTM standard.

3. Cooler (Lebih Sejuk / 凉)



Normal Zinc: 35.1°C



Rofo Brand Zinc Kampong *Zplus*⁺: 33.1°C

4. Latest CRF Technology at Any length (任何長度)

製品の仕様に合わせて、日本と米国の実質55%の亜鉛メッキ
(6', 8', 10', 12', 15', 18" and more....)



SABAH INDUSTRY
EXCELLENCE AWARD 2009

2009



GOLDEN BULL AWARD 2012

2012



WINNER OF THE
BEST MANUFACTURER
MALAYSIA 2012

2012



THE MEMBER OF
MPC MALAYSIA

2013



TOP 5 SME100 2014

2014



SQAS Tested Report no.
2009CB1082



Since 2008

Introduction


Throughout our Continuous effort carried out over the year by our R & D Team, we continue develop the new technologies of CRF technologies and research on better Raw Material.

Today, we successfully adopt one of the best material in World Namely Genuine AZ 55% for Zinc Kampong Profile. This Superior quality is not only exceed the technical Performance of other traditional corrugated profiles but is also the most economical product in terms of value for money. The New Product Namely Rofo Brand Zinc Kampong Z_{plus}^+ .


Regionally, Rofo Brand Zinc Kampong Z_{plus}^+ is the only corrugated profile that can meet the needs for continuous long span requirements using minimum material thickness from 0.17mm and above. It's the only Zinc Kampong come with the Superior Quality even with Thickness from 0.17mm... Rofo Brand Zinc Kampong Z_{plus}^+ not only save \$\$\$\$ in length lapping but also eradicated the problem of rainwater leakages arising from length lapping.



Profile Diagram



Overlapping Details

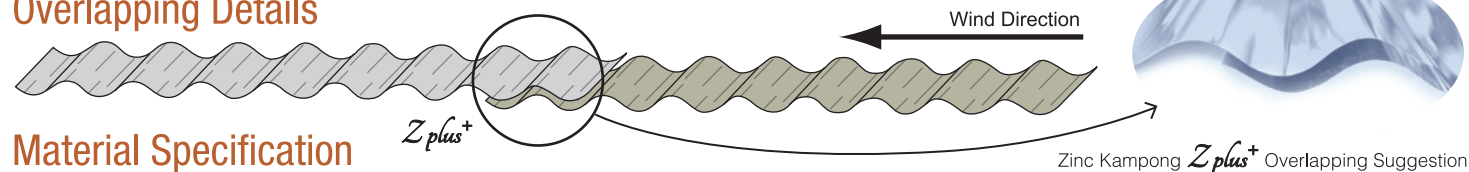

Material Specification

Rofo Brand Zinc kampong Z_{plus}^+ is produced from genuine AZ55% that conform to ASTM A 792M, ISO 9001 Management System. All AZ55% materials which used for the production of Rofo Brand Zinc Kampong Z_{plus}^+ are strictly procure from reputable mills that meets the relevant national or international standards such as JIS, ASTM, BS, AS, MS and others. Genuine Aluminium-Zinc Coating of Aluminium 55%, Zinc 43.3 % and Silicone 1.6% so it has both aluminium-unique corrosion-resistance, heat resistance and Zinc unique "galvanic behavior". Numerous internal quality control tests are carried out to ensure the materials has met the specification requirements. Quality tests such as cyclic corrosion test, condensation test, tensile test and other material conformance requirements are also conducted by other third party.

Base Metal Sheet	: Cold Roll Steel
JISS or ASTM	: ASTM A 792M
Base Steel Coating	: AZ 40-60
Minimum Tensile Strength	: Grade E G550 / High Tensile
Surface treatment	: Anti Finger Print

Size Available

Gauge	Thickness (±0.02mm)
34 BWG	0.20mm
32 BWG	0.23mm (Upon Request)
28 BWG	0.30mm (Upon Request)

Packing and Storage



The Standard factory Packing for Rofo Brand Zinc Kampong Z_{plus}^+ is in 10 Pieces in and out per strap inside one big Bundle. Therefore, it's make easy to count and handling. The Quantity per bundle are based on the Thickness and Length. In case of local orders are less than the standard minimum quantity, the products will be fully covered and protected from dust or rainwater during transportation.

It is important to ensure that all roofing or cladding materials, if it is do not installed immediately upon delivery to site; they must be kept in elevated dry storage area, free from rainwater or moisture. This is to avoid water or moisture traps in between the sheet surfaces, which will cause stained marks, edge rust, de-colorization, and etc. and eventually reduced the material expected lifespan as well as the warranty period.





Rofo Brand Zinc Kampong Z_{plus}^+ Storage

> The Rofo Brand Zinc Kampong Z_{plus}^+ should all the time Storage under proper shelter.

> If Roofing that affected by water should immediately wipe throughly and dried at both edges before re-stacking.

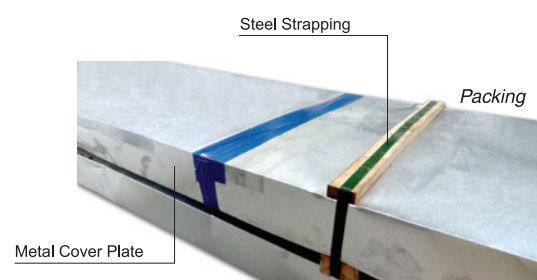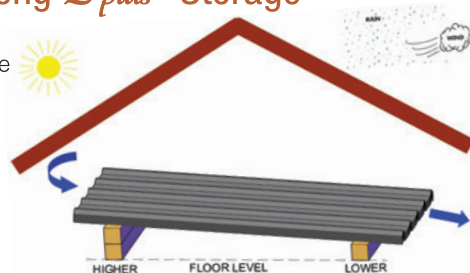

Accessories

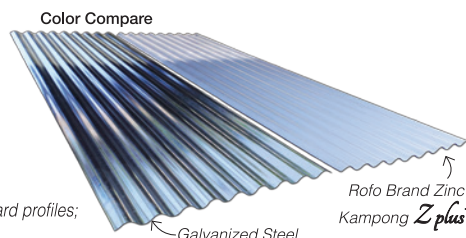

Note: All the measurements are in millimeters (mm). The above items shown are just some of our standard profiles; for customized or specific profile requirements, kindly contact our customer service for assistance.

Zinc Kampong Z_{plus}^+ :

For the Thickness 34BWG, 32BWG, 28BWG available in Rofo Brand Zinc Kampong Z_{plus}^+ (Picture 1 shown the Rofo Brand printed to ensure the Genuine Brand).



Manufactured by:



Kina Roof Industries (Sabah) Sdn. Bhd. (667221-X)
Roofor You Marketing Sdn. Bhd. (1030310-X)

©2008 All the rights reserved by Rofo (2008) Brand of series products. Rofo (2008) brand is trademark of Kina Roof Industries (Sabah) Sdn. Bhd. Rofo reserved the right to review the specification of any materials or accessories contained herein. It is provided without prejudice to the company's terms and conditions of sale. All measurements are nominal only and are depend on the grade and gauge of material used.